


GT3300/3300C

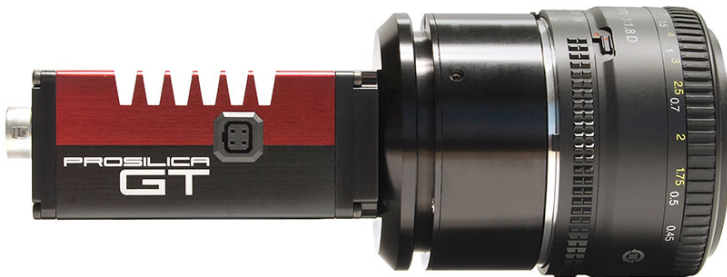

Description

8 Megapixel CCD camera for extreme environments - GigE Vision®



The Prosilica GT3300 is a 8 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT3300 is a rugged camera designed to operate in extreme environments and fluctuating lighting conditions. It offers Precise iris lens control allowing users to fix the aperture size to optimize depth of field, exposure and gain without the need for additional control elements.

- Truesense KAI-08050 sensor
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- Camera and sensor temperature monitoring
- **Models:**
 - GT3300, 3296 x 2472, 14 fps, CCD mono
 - GT3300C, 3296 x 2472, 14 fps, CCD color

Specifications

Prosilica GT		3300
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)	
Resolution	3296 x 2472	
Sensor	Truesense KAI-08050	
Sensor type	CCD Progressive	
Sensor size	Type 4/3	
Cell size	5.5 μm	
Lens mount	F-Mount	
Max frame rate at full resolution	14.7 fps	
A/D	14 bit	
On-board FIFO	128 MB	
Output		
Bit depth	14 (mono) - 12 (color) bit	
Mono modes	Mono8, Mono12, Mono12Packed, Mono14	
Color modes YUV	YUV411Packed, YUV422Packed	
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed	
Raw modes	BayerGR8, BayerGR12, BayerGR12Packed	
General purpose inputs/outputs (GPIOs)		
TTL I/Os	1 input, 2 outputs	
Opto-coupled I/Os	1 input, 2 outputs	
RS-232	1	
Operating conditions/Dimensions		
Operating temperature	-20°C ... +60°C	
Power requirements (DC)	PoE, or 7-25 VDC	
Power consumption (12 V)	5.6 W@ VDC	
Mass	314 g	
Body Dimensions (L x W x H in mm)	121 x 59.7 x 59.7 (including connectors, w/o tripod and lens)	
Regulations	CE, FCC Class A, RoHS (2011/65/EU)	

[Download Prosilica GT3300 Technical drawing](#)

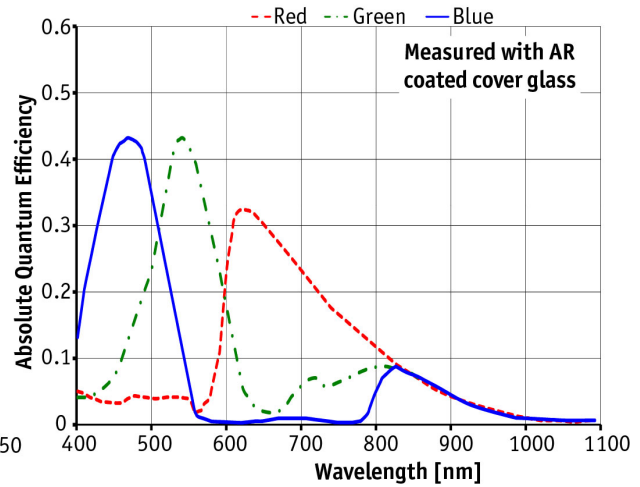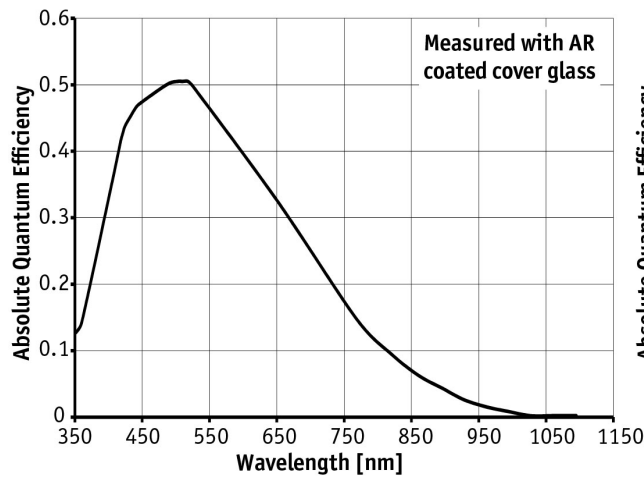

Smart features

The Prosilica GT3300 features include:

- Auto exposure
- Auto gain
- Auto white balance
- Flexible binning
- Region of Interest (ROI) readout
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Auto Iris (P-Iris and DC)
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and multiframe acquisition modes
- Camera and sensor temperature monitoring

White Paper

[Remote lens control with Prosilica GT cameras](#)

Applications

The Prosilica GT3300 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications